

DURARO

Stainless Steel Castors


Application:
Kitchen trolleys; food carts; food processing plants;
restaurants and commercial kitchens;
laboratory equipments.

Size Available:
75x32, 100x32, 125x32, 150x32, 200x32mm

If your mobile equipment is subjected to frequent contact or exposure to moisture, our Duraro would be your absolute choice of castor.

For the same reason, it is a must for most kitchen and food carts which are constantly moved in and out of refrigerating room and steamy kitchen, then hose cleaned to rid of food debris and oil stain, nothing other than stainless steel can stay shiny under such adverse conditions.

On the other extreme, medical or laboratory equipments that has to be sanitized with disinfectants would find Duraro suitable at all time.

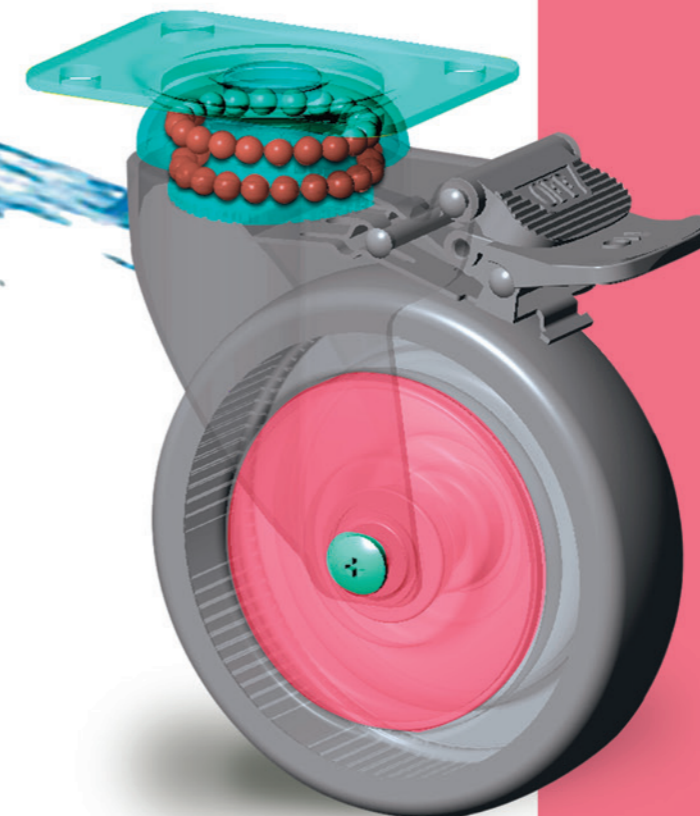

DURARO

Stainless Steel Castors

Pressed stainless steel double ballrace swivel yoke, electrolytic polishing finish



TB/A Total locking brake
Total Lock system locks both swivel head and wheel simultaneously for secure parking. Integrated ON/OFF Nylon brake pedals for easy and quiet operation.



DB/A Directional locking brake
Directional Lock permits free wheel rotation while swivel head remains locked, an easy way to keep equipment traveling straight. Integrated ON/OFF Nylon brake pedals for easy and quiet operation. Release pedal in green color.

T Threaded Stem Fitting with Hex Base Washer

PRB-SS Wheel Plastic hub, grey color elastic rubber tire

Brake type	mm	mm		mm	mm	mm	mm	kg	Code			
TB/A Total locking brake	75	32		1/2-13UNC	1"	33.0	107.0	50	Y380XT2SS/W324S			
	75	32		M12 P1.75	25.0	33.0	107.0	50	Y380XT4SS/W324S			
	75	32		M16 P2.0	25.0	33.0	107.0	50	Y380XT5SS/W324S			
	TB/B Total locking brake	100	32		1/2-13UNC	1"	40.5	135.0	80	Y480XT2SS/W424DS		
		100	32		M12 P1.75	25.0	40.5	135.0	80	Y480XT4SS/W424DS		
		100	32		M16 P2.0	25.0	40.5	135.0	80	Y480XT5SS/W424DS		
		TB/B Total locking brake	125	32		1/2-13UNC	1"	39.0	161.0	100	Y580XT2SS/W524DS	
			125	32		M12 P1.75	25.0	39.0	161.0	100	Y580XT4SS/W524DS	
			125	32		M16 P2.0	25.0	39.0	161.0	100	Y580XT5SS/W524DS	
TB/B Total locking brake			150	32		1/2-13UNC	1"	50.0	189.5	100	Y680XT2SS/W624DS	
			150	32		M12 P1.75	25.0	50.0	189.5	100	Y680XT4SS/W624DS	
			150	32		M16 P2.0	25.0	50.0	189.5	100	Y680XT5SS/W624DS	
	TB/B Total locking brake		75	32		1/2-13UNC	1"	41.0	107.0	50	Y380T2SS/W324S	
			75	32		M12 P1.75	25.0	41.0	107.0	50	Y380T4SS/W324S	
			75	32		M16 P2.0	25.0	41.0	107.0	50	Y380T5SS/W324S	
		TB/B Total locking brake	100	32		1/2-13UNC	1"	40.5	135.0	80	Y480T2SS/W424DS	
			100	32		M12 P1.75	25.0	40.5	135.0	80	Y480T4SS/W424DS	
			100	32		M16 P2.0	25.0	40.5	135.0	80	Y480T5SS/W424DS	
TB/B Total locking brake			125	32		1/2-13UNC	1"	39.0	161.0	100	Y580T2SS/W524DS	
			125	32		M12 P1.75	25.0	39.0	161.0	100	Y580T4SS/W524DS	
			125	32		M16 P2.0	25.0	39.0	161.0	100	Y580T5SS/W524DS	
	TB/B Total locking brake		150	32		1/2-13UNC	1"	46.5	189.5	100	Y680T2SS/W624DS	
			150	32		M12 P1.75	25.0	46.5	189.5	100	Y680T4SS/W624DS	
			150	32		M16 P2.0	25.0	46.5	189.5	100	Y680T5SS/W624DS	



TB Total locking brake
 Total Lock system simultaneously locks both swivel head and wheel for a secure parking.
 Zinc-alloy brake pedal.

T Threaded Stem Fitting with Hex Base Washer

PRB-SS Wheel Plastic hub, grey color elastic rubber tire

Brake type	mm	mm		mm	mm	mm	mm	kg	Code
Non-brake Free swivel	75	32		1/2-13UNC	1"	33.0	107.0	50	Y381T2SS/W324S
	75	32		M12 P1.75	25.0	33.0	107.0	50	Y381T4SS/W324S
	75	32		M16 P2.0	25.0	33.0	107.0	50	Y381T5SS/W324S
	100	32		1/2-13UNC	1"	40.5	135.0	80	Y481T2SS/W424DS
	100	32		M12 P1.75	25.0	40.5	135.0	80	Y481T4SS/W424DS
	100	32		M16 P2.0	25.0	40.5	135.0	80	Y481T5SS/W424DS
	125	32		1/2-13UNC	1"	39.0	161.0	100	Y581T2SS/W524DS
	125	32		M12 P1.75	25.0	39.0	161.0	100	Y581T4SS/W524DS
	125	32		M16 P2.0	25.0	39.0	161.0	100	Y581T5SS/W524DS
	150	32		1/2-13UNC	1"	50.0	189.5	100	Y681T2SS/W624DS
	150	32		M12 P1.75	25.0	50.0	189.5	100	Y681T4SS/W624DS
	150	32		M16 P2.0	25.0	50.0	189.5	100	Y681T5SS/W624DS



Stainless steel

DURARO

Stainless Steel Castors

Pressed stainless steel double ballrace swivel yoke, electrolytic polishing finish



TB/A Total locking brake
Total Lock system locks both swivel head and wheel simultaneously for secure parking. Integrated ON/OFF Nylon brake pedals for easy and quiet operation.



DB/A Directional locking brake
Directional Lock permits free wheel rotation while swivel head remains locked, an easy way to keep equipment traveling straight. Integrated ON/OFF Nylon brake pedals for easy and quiet operation. Release pedal in green color.

T Threaded Stem Fitting with Hex Base Washer

TPR-SS Wheel Plastic hub, grey color thermoplastic rubber tire

Brake type	mm	mm		mm	mm	mm	mm	kg	Code
TB/A Total locking brake	100	32		1/2-13UNC	1"	40.5	135.0	80	Y480XT2SS/W403DS
	100	32		M12 P1.75	25.0	40.5	135.0	80	Y480XT4SS/W403DS
	100	32		M16 P2.0	25.0	40.5	135.0	80	Y480XT5SS/W403DS
	125	32		1/2-13UNC	1"	39.0	161.0	100	Y580XT2SS/W503DS
	125	32		M12 P1.75	25.0	39.0	161.0	100	Y580XT4SS/W503DS
	125	32		M16 P2.0	25.0	39.0	161.0	100	Y580XT5SS/W503DS
TB/B Total locking brake	100	32		1/2-13UNC	1"	40.5	135.0	80	Y480T2SS/W403DS
	100	32		M12 P1.75	25.0	40.5	135.0	80	Y480T4SS/W403DS
	100	32		M16 P2.0	25.0	40.5	135.0	80	Y480T5SS/W403DS
	125	32		1/2-13UNC	1"	39.0	161.0	100	Y580T2SS/W503DS
	125	32		M12 P1.75	25.0	39.0	161.0	100	Y580T4SS/W503DS
	125	32		M16 P2.0	25.0	39.0	161.0	100	Y580T5SS/W503DS












TB Total locking brake
 Total Lock system simultaneously locks both swivel head and wheel for a secure parking.
 Zinc-alloy brake pedal.

T Threaded Stem Fitting with Hex Base Washer



TPR-SS Wheel Plastic hub, grey color thermoplastic rubber tire


Brake type	mm	mm		mm	mm	mm	mm	kg	Code
Non-brake Free swivel	100	32		1/2-13UNC	1"	40.5	135.0	80	Y481T2SS/W403DS
	100	32		M12 P1.75	25.0	40.5	135.0	80	Y481T4SS/W403DS
	100	32		M16 P2.0	25.0	40.5	135.0	80	Y481T5SS/W403DS
	125	32		1/2-13UNC	1"	39.0	161.0	100	Y581T2SS/W503DS
	125	32		M12 P1.75	25.0	39.0	161.0	100	Y581T4SS/W503DS
	125	32		M16 P2.0	25.0	39.0	161.0	100	Y581T5SS/W503DS



TPR-SS/AS Wheel Conductive wheels are also available

Plastic hub, grey color conductive thermoplastic rubber tire, stainless steel ball bearings, stainless steel threadguards

	Code
100 x 32mm	W403DS-AS
125 x 32mm	W503DS-AS



Electrical Resistance $\leq 10^4 \Omega$

 Stainless steel

DURARO

Stainless Steel Castors

Pressed stainless steel double ballrace swivel yoke, electrolytic polishing finish



TB/A Total locking brake
Total Lock system locks both swivel head and wheel simultaneously for secure parking. Integrated ON/OFF Nylon brake pedals for easy and quiet operation.



DB/A Directional locking brake
Directional Lock permits free wheel rotation while swivel head remains locked, an easy way to keep equipment traveling straight. Integrated ON/OFF Nylon brake pedals for easy and quiet operation. Release pedal in green color.

T Threaded Stem Fitting with Hex Base Washer

TPU-SS Wheel Plastic hub, grey color polyurethane tire

Brake type	mm	mm		mm	mm	mm	mm	kg	Code
TB/A Total locking brake	75	32		1/2-13UNC	1"	33.0	107.0	50	Y380XT2SS/W300S
	75	32		M12 P1.75	25.0	33.0	107.0	50	Y380XT4SS/W300S
	75	32		M16 P2.0	25.0	33.0	107.0	50	Y380XT5SS/W300S
	100	32		1/2-13UNC	1"	40.5	135.0	80	Y480XT2SS/W400DS
	100	32		M12 P1.75	25.0	40.5	135.0	80	Y480XT4SS/W400DS
	100	32		M16 P2.0	25.0	40.5	135.0	80	Y480XT5SS/W400DS
	125	32		1/2-13UNC	1"	39.0	161.0	100	Y580XT2SS/W500DS
	125	32		M12 P1.75	25.0	39.0	161.0	100	Y580XT4SS/W500DS
	125	32		M16 P2.0	25.0	39.0	161.0	100	Y580XT5SS/W500DS
TB/B Total locking brake	75	32		1/2-13UNC	1"	41.0	107.0	50	Y380T2SS/W300S
	75	32		M12 P1.75	25.0	41.0	107.0	50	Y380T4SS/W300S
	75	32		M16 P2.0	25.0	41.0	107.0	50	Y380T5SS/W300S
	100	32		1/2-13UNC	1"	40.5	135.0	80	Y480T2SS/W400DS
	100	32		M12 P1.75	25.0	40.5	135.0	80	Y480T4SS/W400DS
	100	32		M16 P2.0	25.0	40.5	135.0	80	Y480T5SS/W400DS
	125	32		1/2-13UNC	1"	39.0	161.0	100	Y580T2SS/W500DS
	125	32		M12 P1.75	25.0	39.0	161.0	100	Y580T4SS/W500DS
	125	32		M16 P2.0	25.0	39.0	161.0	100	Y580T5SS/W500DS
150	32		1/2-13UNC	1"	46.5	189.5	100	Y680T2SS/W600DS	
150	32		M12 P1.75	25.0	46.5	189.5	100	Y680T4SS/W600DS	
150	32		M16 P2.0	25.0	46.5	189.5	100	Y680T5SS/W600DS	





TB Total locking brake
 Total Lock system simultaneously locks both swivel head and wheel for a secure parking.
 Zinc-alloy brake pedal.

T Threaded Stem Fitting with Hex Base Washer

TPU-SS Wheel Plastic hub, grey color polyurethane tire

Brake type	mm	mm		mm	mm	mm	mm	kg	Code
Non-brake Free swivel	75	32		1/2-13UNC	1"	33.0	107.0	50	Y381T2SS/W300S
	75	32		M12 P1.75	25.0	33.0	107.0	50	Y381T4SS/W300S
	75	32		M16 P2.0	25.0	33.0	107.0	50	Y381T5SS/W300S
	100	32		1/2-13UNC	1"	40.5	135.0	80	Y481T2SS/W400DS
	100	32		M12 P1.75	25.0	40.5	135.0	80	Y481T4SS/W400DS
	100	32		M16 P2.0	25.0	40.5	135.0	80	Y481T5SS/W400DS
	125	32		1/2-13UNC	1"	39.0	161.0	100	Y581T2SS/W500DS
	125	32		M12 P1.75	25.0	39.0	161.0	100	Y581T4SS/W500DS
	125	32		M16 P2.0	25.0	39.0	161.0	100	Y581T5SS/W500DS
	150	32		1/2-13UNC	1"	50.0	189.5	100	Y681T2SS/W600DS
	150	32		M12 P1.75	25.0	50.0	189.5	100	Y681T4SS/W600DS
	150	32		M16 P2.0	25.0	50.0	189.5	100	Y681T5SS/W600DS



Stainless steel

DURARO

Stainless Steel Castors

Pressed stainless steel double ballrace swivel yoke, electrolytic polishing finish



TB/A Total locking brake
Total Lock system locks both swivel head and wheel simultaneously for secure parking. Integrated ON/OFF Nylon brake pedals for easy and quiet operation.



DB/A Directional locking brake
Directional Lock permits free wheel rotation while swivel head remains locked, an easy way to keep equipment traveling straight. Integrated ON/OFF Nylon brake pedals for easy and quiet operation. Release pedal in green color.

T Threaded Stem Fitting with Hex Base Washer



PM-SS Wheel

Solid nylon wheel, stainless steel roller bearing, stainless steel threadguards

Brake type	mm	mm		mm	mm	mm	mm	kg	Code
TB/A Total locking brake	75	32		1/2-13UNC	1"	33.0	107.0	50	Y380XT2SS/W309RXS
	75	32		M12 P1.75	25.0	33.0	107.0	50	Y380XT4SS/W309RXS
	75	32		M16 P2.0	25.0	33.0	107.0	50	Y380XT5SS/W309RXS
	100	32		1/2-13UNC	1"	40.5	135.0	80	Y480XT2SS/W409RXS
	100	32		M12 P1.75	25.0	40.5	135.0	80	Y480XT4SS/W409RXS
	100	32		M16 P2.0	25.0	40.5	135.0	80	Y480XT5SS/W409RXS
	125	32		1/2-13UNC	1"	39.0	161.0	100	Y580XT2SS/W509RXS
	125	32		M12 P1.75	25.0	39.0	161.0	100	Y580XT4SS/W509RXS
	125	32		M16 P2.0	25.0	39.0	161.0	100	Y580XT5SS/W509RXS
TB/B Total locking brake	75	32		1/2-13UNC	1"	41.0	107.0	50	Y380T2SS/W309RXS
	75	32		M12 P1.75	25.0	41.0	107.0	50	Y380T4SS/W309RXS
	75	32		M16 P2.0	25.0	41.0	107.0	50	Y380T5SS/W309RXS
	100	32		1/2-13UNC	1"	40.5	135.0	80	Y480T2SS/W409RXS
	100	32		M12 P1.75	25.0	40.5	135.0	80	Y480T4SS/W409RXS
	100	32		M16 P2.0	25.0	40.5	135.0	80	Y480T5SS/W409RXS
	125	32		1/2-13UNC	1"	39.0	161.0	100	Y580T2SS/W509RXS
	125	32		M12 P1.75	25.0	39.0	161.0	100	Y580T4SS/W509RXS
	125	32		M16 P2.0	25.0	39.0	161.0	100	Y580T5SS/W509RXS





TB Total locking brake
 Total Lock system simultaneously locks both swivel head and wheel for a secure parking.
 Zinc-alloy brake pedal.

T Threaded Stem Fitting with Hex Base Washer



PM-SS Wheel Solid nylon wheel, stainless steel roller bearing, stainless steel threadguards

Brake type	mm	mm		mm	mm	mm	mm	kg	Code
Non-brake Free swivel	75	32		1/2-13UNC	1"	33.0	107.0	50	Y381T2SS/W309RXS
	75	32		M12 P1.75	25.0	33.0	107.0	50	Y381T4SS/W309RXS
	75	32		M16 P2.0	25.0	33.0	107.0	50	Y381T5SS/W309RXS
	100	32		1/2-13UNC	1"	40.5	135.0	80	Y481T2SS/W409RXS
	100	32		M12 P1.75	25.0	40.5	135.0	80	Y481T4SS/W409RXS
	100	32		M16 P2.0	25.0	40.5	135.0	80	Y481T5SS/W409RXS
	125	32		1/2-13UNC	1"	39.0	161.0	100	Y581T2SS/W509RXS
	125	32		M12 P1.75	25.0	39.0	161.0	100	Y581T4SS/W509RXS
	125	32		M16 P2.0	25.0	39.0	161.0	100	Y581T5SS/W509RXS



Stainless steel