


## FEATURES

**Double Pedal designed floor locks provide greater operator safety.**

- The double pedals will not allow the operator to place his foot under the load
- Large steel disc has non-marking rubber pad for non-slip floor contact.
- All steel construction for ruggedness.
- Electro-plated finish.

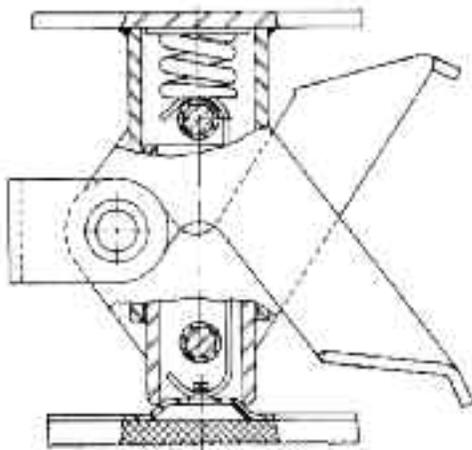

**Cut-away side view illustrates compression and retraction springs.**

### HOW TO OPERATE:

- Simply press down on the larger pedal to set positive locking force of 90 to 120 lbs. against the floor.
- Press down on the release pedal and spring quickly returns lock to non-operating position.
- Both pedals are out in front for safety and ease of operation.

## FLOOR LOCK SPECIFICATIONS

OAH Extended (in)	OAH Retracted (in)	Weight (lb)	Width x Length (in)	Bolt Hole Spacing (in)	Bolt Hole Size (in)	Part Number
5-3/8	4-7/8	4-1/2	3-3/4 x 4-5/8	2-5/8 x 3-5/8 slotted to 3 x 3	25/64	558-FL
5-3/4	5	4-1/2	3-3/4 x 4-5/8	2-5/8 x 3-5/8 slotted to 3 x 3	25/64	534-FL
6-1/4	5-1/2	4-1/2	3-3/4 x 4-5/8	2-5/8 x 3-5/8 slotted to 3 x 3	25/64	614-FL
6-1/2	5-3/4	4-1/2	3-3/4 x 4-5/8	2-5/8 x 3-5/8 slotted to 3 x 3	25/64	612-FL
6-3/4	6	4-3/4	3-3/4 x 4-5/8	2-5/8 x 3-5/8 slotted to 3 x 3	25/64	634-FL
7-1/4	6-1/2	4-3/4	3-3/4 x 4-5/8	2-5/8 x 3-5/8 slotted to 3 x 3	25/64	714-FL
7-3/4	7	4-3/4	3-3/4 x 4-5/8	2-5/8 x 3-5/8 slotted to 3 x 3	25/64	734-FL
9-3/4	9	5	3-3/4 x 4-5/8	2-5/8 x 3-5/8 slotted to 3 x 3	25/64	934-FL
10-1/2	9-3/4	5	3-3/4 x 4-5/8	2-5/8 x 3-5/8 slotted to 3 x 3	25/64	1012-FL