



# SPRING LOADED GATE CASTERS

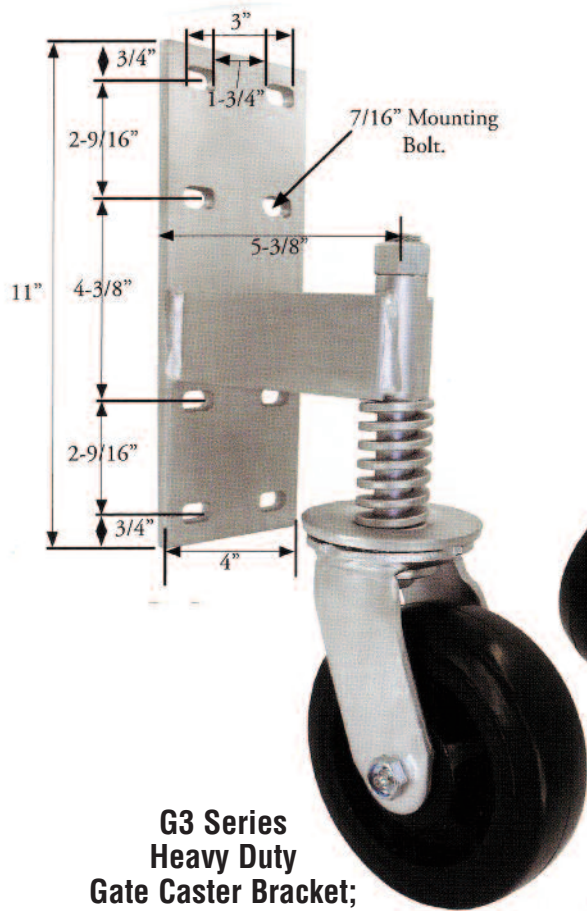

**G3 Series Heavy Duty Gate Caster Bracket;**  
Available with 27 or 67 Caster Series Yoke Installed.


Load Capacity 180 - 700 lbs.

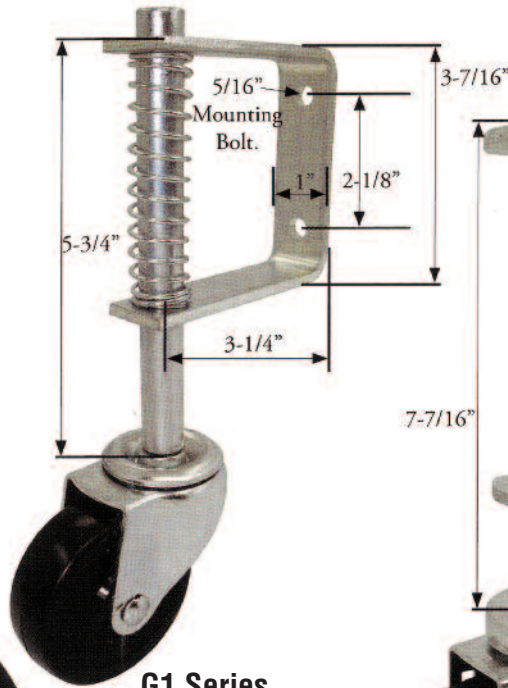

**G1 Series Light Duty Gate Caster Bracket**

**G109TP40DH8191YY**  
4 x 1 non-marking thermo pro black on gray wheel tread wheel-plain bore swivel caster with double ball raceway

Load Capacity 75 - 100 lbs.

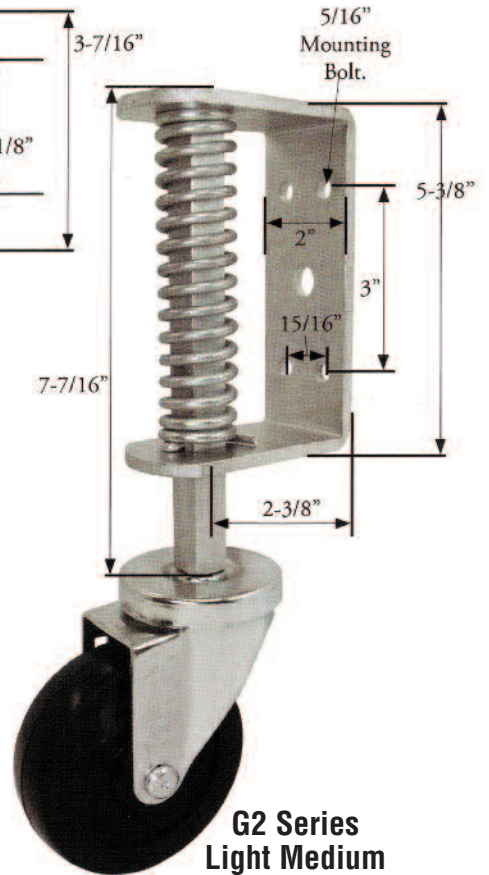

**G2 Series Light Medium Duty Gate Caster Bracket**

Load Capacity 100 - 125 lbs.

- Shock absorbing ride over uneven ground
- G1 - light duty, fits 7/16" grip ring stem casters
- G2 - medium duty, available for threaded stem and grip ring stem caster
- G3 - heavy duty

**Specify wheel type**

# SPRING LOADED GATE CASTERS

Series	Recommended Caster Series	Caster Fastening	Stem Spec	Bracket with Spring Only	Bracket with Caster Yoke Only	Rotating Spacing	Spring Deflection		Mounting Plate Specification		
							Range (lb.)	Movement	Overall Size	Bolt Size	Bolt Hole Pattern
G1	Caster Series #08, #09, 4 & under, #21, 3-1/2" & under	53, 90, 91, 97	7/16" grip ring	G1GRZZ		3-1/4"	75 to 100 lbs.	1"	1" x 3-7/16"	5/16"	2 Bolts 2-1/8" apart
G2*	Caster Series #09, #21	53, 90, 91, 97		G2GRZZ		2-3/8"	100 to 125 lbs.	1"	2" x 5-3/8"	5/16"	4 Bolts 15/16" x 3"
		59, 66, 67 68, 69	1/2"-13	G2TSZZ							
G3**	Caster Series #27, 6" dia. whl. Caster Series #27 & #67 8" dia whl.	37	3/4"-10 x 5 1/2"	G334ZZ	G327ZZ60JZ8337YY	5-1/4"	180 to 700 lbs.	1"	4" x 11"	7/16"	1-7/8" x 2-9/16" & 4-3/8" & 9-1/2"
				G380ZZ	G327ZZ80JZ8337YY	6-1/2"					

\*G2 Series: recommended for use on gate with a space between the ground to bottom of the gate of 6" or more.

\*\*G3 Series: recommended for heavy duty gate, use 6" caster when space between ground to gate is 7-1/2" to 9-1/2", when space is over 9-1/2" use 8" caster.

Any caster with the appropriate stem fastening may be inserted into the G1 & G2 Series Bracket as long as the casters swivel radius is less than the stated "Rotating Spacing".

*Please note: any caster with swivel radius larger than the "Rotating Spacing" will not be able to swivel a full 360° and will hit the gate or door the bracket assembly is attached to; and will not operate correctly.*

## Specify wheel type