



- Built-in stabilizer is adjustable
- Rubber stabilizer "post" helps absorb shaking and shock
- Excellent low-profile caster for workstations that only occasionally move
- Stabilizer acts as a miniature "lock" when fully engaged--prevents caster from moving
- Strong nylon wheel is non-marking
- Double race swivel design
- Available in top plate and stemless fastenings

- Corrosion-resistant zinc plated finishing, sleek chrome plating or Ivory powder coating for extra style
- Extra load capacity with stabilizer engaged

- Application include : Computer workstations  
Work tables  
Printer and electronic stands

Wheel Dia.	Hub Length	Wheel Type with Plain Bearing	Capacity (lb.) Rolling / Stabilized	OAH	Swivel Lead	Part Number	Type
1-3/4"	1-1/16"	NYL-Nylon	220 / 550	2-3/4"	2-13/32"	9320-00-NYL	Stemless
1-3/4"	1-1/16"	NYL-Nylon	220 / 550	2-3/4"	2-13/32"	9320-01-NYL	Square Plate
1-3/4"	1-1/16"	NYL-Nylon	220 / 550	2-3/4"	2-13/32"	9320-02-NYL	Hexagon Plate
2-1/2"	1-3/8"	NYL-Nylon	320 / 1,000	4-1/32"	3-3/32"	9330-00-NYL	Stemless
2-1/2"	1-3/8"	NYL-Nylon	320 / 1,000	4-1/32"	3-3/32"	9330-01-NYL	Square Plate

Dia.	Type	Size	Code
1-3/4"	Stemless	M12 x 1.75P Tap Depth 9/32"	00
1-3/4"	Hexagon Plate	Overall: 2-3/4" x 2-3/4" Hole Spacing: Center dia. 65mm x 6 holes Attaching Bolt Size: M6 x 1.0P	02
1-3/4"	Square Plate	Overall: 2-7/8" x 2-7/8" Hole Spacing: 2-9/32" x 2-9/32" Attaching Bolt Size: M6 (1/4")	01
2-1/2"	Stemless	M12 x 1.75P Tap Depth 25/32"	00
1-3/4"	Square Plate	Overall: 3-35/64" x 3-35/64" Hole Spacing: 2-3/4" x 2-3/4" Attaching Bolt Size: M8 (5/16")	01

Code	Finish
IPC	Ivory Power Coating (Standard)
ZN	Zinc Plating
CR	Chrome Plating

See our  
**Specialty Products Section**  
for Saginaw Leveling Jacks.

LC/SS Stem Type



LC/SS Plate Type



## Stainless Steel Leveling Casters Available in the following sizes:

Model #	Load per Unit	Recommended Total Load / 4 Units
LC/40/SS	150 lbs	370 lbs
LC/60/SS	800 lbs	1650 lbs
LC/40/SS	1700 lbs	3500 lbs

Available in plate and stem sizes.

Call Acorn™ for complete specifications and dimensions.


## LEVELING CASTERS

### Load Capacity Up to 2200 lbs.




- Stabilizer acts as a miniature "total lock" when fully engaged – prevents caster/equipment from moving
- Excellent low-profile caster
- Double race swivel design
- Stylish ivory powder coating
- NSF Listed for food service industry

### TYPICAL APPLICATIONS

- Computer Workstations
- Printer and Other Electronic Equipment Stands
- Work Tables
- Food Service
- Pharmaceutical

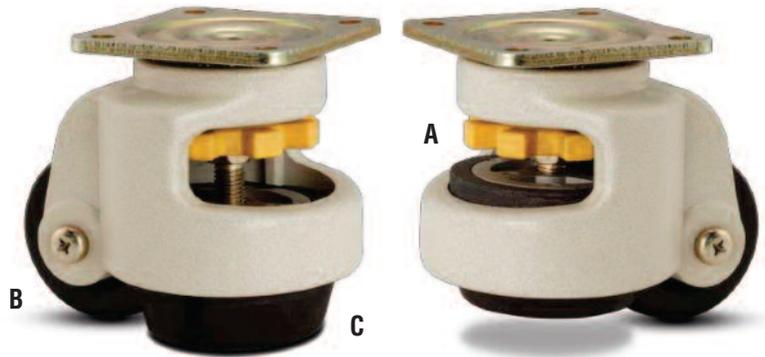

- A.** Built-in leveler is easily adjustable
- B.** Strong nylon wheel is non-marking
- C.** Rubber stabilizer "post" helps absorb equipment shaking and shock (turn yellow dial until caster is lifted off the ground)



Dia. (in.)	Width (in.)	Hub (lbs.)	OAH (in.)	Max. OAH Using Leveler	Capacity (lb)	Swivel Lead (in.)	Weight (lb)	Part Number
1.68	.70	.80	2.80	3.27	110	3.40	.82	WSLC-NN-PL-0104-S
2.00	.88	.93	3.23	3.70	660	3.90	1.50	WSLC-NN-PL-0204-S
2.40	1.13	1.23	4.02	4.61	1320	5.30	3.00	WSLC-NN-PL-02X4-S
2.86	1.25	1.32	4.72	5.51	2200	5.60	3.70	WSLC-NN-PL-0304-S

## Stainless Steel Leveling Casters available in the following sizes:

Model No.	Load per Unit	Recommended Total Load / 4 Units
LC/40/SS	150 lbs	370 lbs
LC/60/SS	800 lbs	1650 lbs
LC/40/SS	1700 lbs	3500 lbs

Available in plate and stem sizes.  
Call Acorn™ for complete specifications and dimensions.

