




### JACKING CASTER

- Easy
- Accurate
- Vertical
- Adjustment

**Wheels:**  
**Vulkollan™ Tread**  
 or  
**Nylacron™ (NY/MD)**

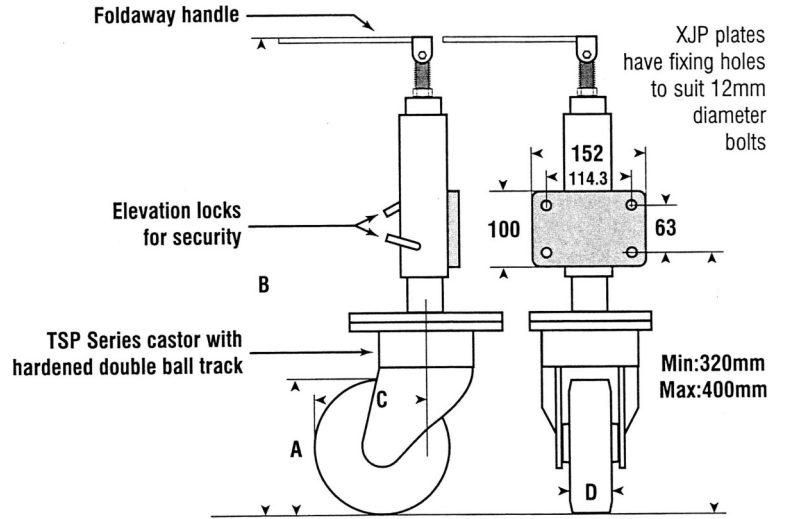

25.4 mm	=	1"
63 mm	=	2-1/2 "
100 mm	=	4 "
114.3 mm	=	4-1/2 "
152 mm	=	6 "
320 mm	=	12.60"
400 mm	=	15.75"

Diameter (mm / in)	OAH (mm / in)	Swivel Radius (mm / in)	Tread Width (mm / in)	Wheel Type	Capacity (lb)	Swivel Part Number
200 / 8	635 / 25	172 / 6-3/4	50 / 2	Rubber / Cast Iron Core (RY/CA)	1180	XPJ/RY/CA-200/50/PB-S
200 / 8	635 / 25	172 / 6-3/4	45 / 1-3/4	Vulkollan™ / Cast Iron Core (VU/CA)	2200	XPJ/VU/CA-200/45/PB-S
200 / 8	635 / 25	172 / 6-3/4	45 / 1-3/4	Vulkollan™ (VU)	2200	XPJ/VU-200/45/PB-S
200 / 8	635 / 25	172 / 6-3/4	45 / 1-3/4	Nylacron™ (NY/MD)	2200	XPJ/NY/MD-200/45/PB-S
200 / 8	635 / 25	172 / 6-3/4	45 / 1-3/4	Nylacron™ Monocast (NY/MC)	2200	XPJ/NY/MC-200/45/PB-S