




# NYLACRON™ CONVEYOR ROLLERS

## EURO (MM) DIMENSIONS

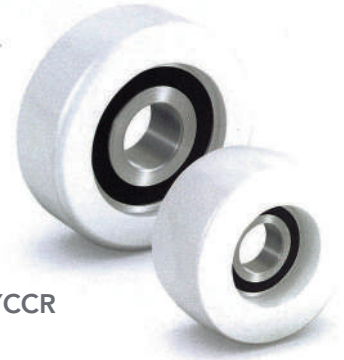

SERIES NYCCR

Item #	Diameter (mm)	Wheel Width (mm)	Hub Length (mm)	Bolt Hole (mm)	Load Capacity (kg)
NYCCR/030/011/5/8	30	11	7	8	60
NYCCR/040/014,5/5/10	40	14,5	8	10	100
NYCCR//040/016/5/15*	40	16	9	15	120
NYCCR/040/018,5/5/10	40	18,5	8	10	140
NYCCR/042/014,5/5/10	42	14,5	8	10	110
NYCCR/042/014,5/5/12	42	14,5	10	12	110
NYCCR/044/016/5/12	44	16	8	12	130
NYCCR//050/012/5/8*	50	12	7	8	110
NYCCR/050/015/5/10	50	15	9	10	140
NYCCR/050/015/5/12	50	15	8	12	140
NYCCR/050/020/5/12*	50	20	10	12	190
NYCCR/050/018/5/12*	50	18	10	12	170
NYCCR//054/022/5/12	54	22	10	12	230
NYCCR/055/025/5/15 B**	55	25	9	15	270
NYCCR/060/030/5/15 GF30	60	30	13	15	350
NYCCR/062/020/5/12	62	20	19	12	240
NYCCR/065/018,5/5/10	65	18,5	9	10	230
NYCCR/065/018,5/5/12	65	18,5	10	12	230
NYCCR//070/035/5/20 B**	70	35	41	20	490
NYCCR/080/020/5/12	80	20	10	12	310
NYCCR//080/020/5/15	80	20	10	15	310
NYCCR/080/020/5/17	80	20	12	17	310
NYCCR//080/025/5/25	80	25	12	25	400

25.4 mm = 1 inch 1 kg = 2.2 lbs

GF30 = reinforced-fiberglass

### NYLACRON™ conveyor rollers with ball bearings

Roller body made of high-quality thermoplastic polyamide molded around the ball bearing (1/5).

Same as above, but roller body with wider tread.

Item #	Diameter (mm)	Wheel Width (mm)	Hub Length (mm)	Bolt Hole (mm)	Load Capacity (kg)
NYCCR/030/011/5/8	30	11	7	8	60
NYCCR/040/014,5/5/10	40	14,5	8	10	100
NYCCR/040/016/5/15*	40	16	9	15	120
NYCCR/040/018,5/5/10	40	18,5	8	10	140
NYCCR/042/014,5/5/10	42	14,5	8	10	110

25.4 mm = 1 inch 1 kg = 2.2 lbs

\*black \*\*with crowned tread



# URETHANE CONVEYOR ROLLERS

## EURO (MM) DIMENSIONS



SERIES UCR

Item #	Diameter (mm)	Wheel Width (mm)	Hub Length (mm)	Bolt Hole (mm)	Load Capacity (kg)
UCR/030/011/5/8	30	11	7	8	30
UCR/040/014,5/5/10*	40	14,5	8	10	50
UCR/040/016/5/15**	40	16	8	15	55
UCR/040/020/5/10	40	20	9	10	70
UCR/042/014,5/5/10	42	14,5	8	10	55
UCR/042/014,5/5/12	42	14,5	10	12	55
UCR/050/015/5/10	50	15	9	10	70
UCR/050/015/5/12	50	15	8	12	70
UCR/050/018/5/17	50	18	11	17	80
UCR/050/025/5/12*	50	25	10	12	100
UCR/055/025/5/15	55	25	9	15	110
UCR/060/018/5/12	60	18	10	12	90
UCR/060/020/5/17	60	20	12	17	95
UCR/062/020/5/17	62	20	14	17	110
UCR/065/018,5/5/12	65	18,5	10	12	100
UCR/070/025/5/20*	70	25	14	20	150
UCR/080/020/5/12	80	20	10	12	140
UCR/080/020/5/15	80	20	11	15	140
UCR/080/020/5/17	80	20	12	17	140
UCR/080/020/5/20	80	20	14	20	140
UCR/080/025/5/25	80	25	12	25	170

25.4 mm = 1 inch 1 kg = 2.2 lbs

### URETHANE conveyor rollers with ball bearings

Roller body made of high-quality thermoplastic polyurethane (96° Shore A) molded around the ball bearing (/5).

Same as above, but roller body with wider tread.

Item #	Diameter (mm)	Wheel Width (mm)	Hub Length (mm)	Bolt Hole (mm)	Load Capacity (kg)
UCRWT/038/028/5/12	38	28	10	12	80
UCRWT/038/038/5/12	38	38	10	12	110
UCRWT/042/028/5/10	42	28	8	10	90
UCRWT/042/028/5/12	42	28	8	12	90
UCRWT/042/038/5/12	42	38	10	12	130

25.4 mm = 1 inch 1 kg = 2.2 lbs

\*brown \*\*black

