

**Caster Type**

**Page**

125 Kingpinless Casters.....	2-3
2-125 Dual Wheel Kingpinless Casters .....	4-5

---

**ALL WHEELS ARE AVAILABLE WITH  
PRECISION BALL BEARING, CENTERPIECE & END CAPS  
FOR MANUAL OR TOWING TO FIT IN 3-1/2" HUB LENGTH RIGS.  
See Wheel Section for complete selection.**

---


## 17,000 LBS. LOAD CAPACITY KINGPINLESS TYPE CASTERS



- **Top Plate:** 3/4" thick AISI 1045 steel one-piece forging precision machined and through-hardened for longer life.
- **Swivel Section:** Patented Kingpinless single ball bearing precision machined raceway hardened to 53 Rockwell C Minimum, 7" diameter raceway with 3/4" diameter ball bearings.
- **Legs:** 1/2" thick through-hardened steel welded to yoke base using 100,000 psi weld filler.
- **Axle:** 1-1/4" diameter.
- **Finish:** Zinc plated.
- Alternate or custom caster configurations available.

**OPTIONS**

- DSL** Demountable Swivel Lock
- HDSL** Heavy Duty Demountable Swivel Lock
- FCWB** Face Contact Wheel Brake
- HT** High Temperature Lubrication
- LT** Low Temperature Lubrication
- NY** Notched Yoke
- PCWB** Poly Cam Wheel Brake
- SL** Swivel Lock
- SR** Sealed Swivel Raceway
- WS** Wheel Seals
- ZP** Zinc Plated



**TOE GUARDS  
AVAILABLE  
TO**

**MOUNTING PLATE OPTIONS****TOP PLATE: (STANDARD)**

**Plate Size:** 8-1/2" x 8-1/2"

**Bolt Holes:** 7" x 7"

**Bolt Size:** 5/8"

**RIGID LL**

**Plate Size:** 8-1/2" x 11"

**Bolt Holes:** 7" x 9-3/4"

**Bolt Size:** 5/8"


Add options to end of part number.

**TYPICAL APPLICATIONS**

- Two lines
- Utility carts
- Platform trucks
- Boat and ship building
- Heavy machinery & equipment
- Tractor pulled trailers
- Heavy duty applications

**NYLACRON™ WHEELS  
PRECISION BALL BEARING  
NY/MD**

- Precision Machined from Cast Polyamide. Hardness 112-120 Rockwell R.
- Ultimate choice for Extremely High Load applications to replace metallic wheels.
- Offer very high abrasion resistance and very low rolling resistance under extreme loads.
- Resistant to salt, grease, alcohol and mild acids - can be used in corrosive applications with appropriate bearings.
- Large Precision Ball Bearings.
- Temperature Range: -40°F to +270°F.



Part Number Swivel Caster	Part Number Rigid Caster	Wheel Diameter (inch)	Tread Width (inch)	Load Capacity (lbs)	Overall Height (inch)	Swivel Part Number Add B, P, PL, R or T*	
						Swivel Lead (inch)	Wt. (lbs)
125S84NYMD	125R84NYMD	8	4	17,000	11-1/2	2-3/16	60
125S104NYMD	125R104NYMD	10	4	17,000	13	2-9/16	72
125S105NYMD	125R105NYMD	10	5	17,000	13	2-9/16	75
125S115NYMD	125R115NYMD	11	5	17,000	14	2-5/8	80
125S116NYMD	125R116NYMD	11	6	17,000	14	2-3/4	82
125S124NYMD	125R124NYMD	12	4	17,000	15-1/2	3-3/8	78
125S125NYMD	125R125NYMD	12	5	17,000	15-1/2	3-3/8	82
125S126NYMD	125R126NYMD	12	6	17,000	15-1/2	3-3/8	84
125S144NYMD	125R144NYMD	14	4	17,000	18	3-11/16	90
125S145NYMD	125R145NYMD	14	5	17,000	18	3-11/16	92
125S146NYMD	125R146NYMD	14	6	17,000	18	3-11/16	94
125S164NYMD	125R164NYMD	16	4	17,000	19	3-9/16	96
125S165NYMD	125R165NYMD	16	5	17,000	19	3-9/16	98
125S185NYMD	125R185NYMD	18	5	17,000	22	4-1/4	100
125S205NYMD	125R205NYMD	20	5	17,000	23	4-1/4	104




### Nylacron™ Wheels

With Precision Ball Bearings for Any Application  
(also available in black, blue, white & red)

Nylacron™ wheels with proper sized precision bearings are made to fit in any rig hub length and axle size. Nylacron™ wheels have greater load capacity ratings with better rollability while requiring less maintenance and have longer life.

**SEE NYLACRON™ WHEEL SECTION  
FOR CUSTOM SIZES & SHAPES.**

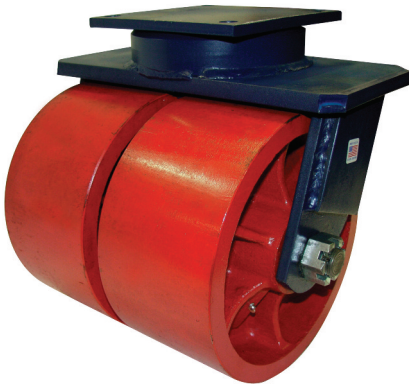

### 30,000 LBS. LOAD CAPACITY KINGPINLESS TYPE CASTERS

- **Raceway Design:** Patented Kingpinless single ball bearing precision machined raceway hardened to 53 Rockwell C. Minimum. 7" diameter raceway with 3/4" diameter ball bearings
- **Axle:** 1-1/4" bolt with rotation prevent lug on leg and slotted nut adjustment.
- **Finish:** Laguna Blue paint.
- **Wheels:** Wheels are either 4", 5" or 6" wide depending upon diameter and wheel type. Roller bearing wheels are equipped with a bearing which rotates on hardened and ground spanners. Tapered bearing wheels have a 1-1/4" I.D. tapered bearing which rotate directly on a 1-1/4" axle. All wheels have lubrication fittings.
- **Mounting Plate Size:** 8-1/2" x 8-1/2" x 1/2"
- **Bolt Hole Spacing:** 7" x 7"
- **Mounting Bolt Diameter:** 5/8"
- **Leg Thickness:** 1/2" thick including the center leg.

### RIG OPTION CODES

<b>DSL*</b>	Demountable Swivel Lock*
<b>HDSL</b>	Heavy Duty Demountable Swivel Lock
<b>HT</b>	High Temperature Lubrication
<b>LT</b>	Low Temperature Lubrication
<b>NY</b>	Notched Yoke
<b>PCWB</b>	Poly Cam Wheel Brake
<b>SL</b>	Swivel Lock
<b>SR</b>	Sealed Swivel Raceway
<b>WS</b>	Wheel Seals
<b>ZP</b>	Zinc Plated

\*When ordering DSL, you must also order NY.

### MOUNTING PLATE (SWIVEL/RIGID)

Top Plate	Plate Size	Bolt Hole Spacing	Bolt Size
<b>STANDARD</b>	8-1/2" x 8-1/2"	7" x 7"	5/8"
<b>OPTIONAL</b>	8-1/2" x 11"	7" x 9-3/4"	5/8"

**NYLACRON™ WHEELS  
PRECISION BALL BEARING  
NY/MD**

- Precision Machined from Cast Polyamide. Hardness 112-120 Rockwell R.
- Ultimate choice for Extremely High Load applications to replace metallic wheels.
- Offer very high abrasion resistance and very low rolling resistance under extreme loads.
- Resistant to salt, grease, alcohol and mild acids - can be used in corrosive applications with appropriate bearings.
- Large Precision Ball Bearings.
- Temperature Range: -40°F to +270°F.



Part Number Swivel Caster	Part Number Rigid Caster	Wheel Diameter (inch)	Tread Width (inch)	Load Capacity (lbs)	Overall Height (inch)	Swivel Part Number Add B, P, PL, R or T*		Wt. (lbs)
						Swivel Lead (inch)		
2-125S84NYMD	2-125R84NYMD	8	4	17,000	11-1/2	2-3/16		60
2-125S104NYMD	2-125R104NYMD	10	4	17,000	13	2-9/16		72
2-125S105NYMD	2-125R105NYMD	10	5	17,000	13	2-9/16		75
2-125S115NYMD	2-125R115NYMD	11	5	17,000	14	2-5/8		80
2-125S116NYMD	2-125R116NYMD	11	6	17,000	14	2-3/4		82
2-125S124NYMD	2-125R124NYMD	12	4	17,000	15-1/2	3-3/8		78
2-125S125NYMD	2-125R125NYMD	12	5	17,000	15-1/2	3-3/8		82
2-125S126NYMD	2-125R126NYMD	12	6	17,000	15-1/2	3-3/8		84
2-125S144NYMD	2-125R144NYMD	14	4	17,000	18	3-11/16		90
2-125S145NYMD	2-125R145NYMD	14	5	17,000	18	3-11/16		92
2-125S146NYMD	2-125R146NYMD	14	6	17,000	18	3-11/16		94
2-125S164NYMD	2-125R164NYMD	16	4	17,000	19	3-9/16		96
2-125S165NYMD	2-125R165NYMD	16	5	17,000	19	3-9/16		98
2-125S185NYMD	2-125R185NYMD	18	5	17,000	22	4-1/4		100
2-125S205NYMD	2-125R205NYMD	20	5	17,000	23	4-1/4		104



### Nylacron™ Wheels

**With Precision Ball Bearings for Any Application  
(also available in black, blue, white & red)**

Nylacron™ wheels with proper sized precision bearings are made to fit in any rig hub length and axle size. Nylacron™ wheels have greater load capacity ratings with better rollability while requiring less maintenance and have longer life.

**SEE NYLACRON™ WHEEL SECTION  
FOR CUSTOM SIZES & SHAPES.**