

1 RB BALL CASTERS Elastic Rubber

Original Glass Handling Casters for transport tables in the glass industry.

25.4 mm = 1 inch



Elastic Natural Rubber Ball Caster

Color Black, 70° Shore A

L = left hand R = right hand

- Temperature Range: -20°C to +80°C of short duration up to 120°C.
- Excellent cutting strength, non-marking, high wear resistance.
- Elastic properties prevent damaging.

ELASTIC RUBBER WHEEL BALL CASTER WITH THREADED STEM

Left Hand	Right Hand	A (mm)	B (mm)	C (mm)	O (mm)	P (mm)	Load Capacity kg.
RB GL 35 075	RB GR 35 075	35	54/71	87	14	75	12
RB GL 35 055	RB GR 35 055	35	54/71	92	14	55	12
RB GL 50 100	RB GR 50 100	50	69/91	107	14	100	20

ELASTIC RUBBER WHEEL BALL CASTER WITHOUT THREADED STEM

Left Hand	Right Hand	A (mm)	P (mm)	Load Capacity kg.
RB GL 35 075Z	RB GR 35 075Z	35	75	12
RB GL 35 055Z	RB GR 35 055Z	35	55	12
RB GL 50 100Z	RB GR 50 100Z	50	100	20

ELASTIC RUBBER BALL ONLY WITH PLASTIC INSERT

Ball Only	A (mm)
#SPC 35	35
#SPC 50	50

25.4 mm = 1 inch



Elastic Natural Rubber Ball

Stainless Steel Caster

Color Black, 70° Shore A

L = left hand R = right hand

- Temperature Range: -20°C to +80°C of short duration up to 120°C.
- Completely rust proof.
- Excellent cutting strength, non-marking, high wear resistance.
- Elastic properties prevent damaging.

ELASTIC RUBBER STAINLESS STEEL BALL CASTER WITH THREADED STEM

Left Hand	Right Hand	A (mm)	B (mm)	C (mm)	O (mm)	P (mm)	Load Capacity kg.
RB IL 35 075	RB IR 35 075	35	54/71	87	14	75	12
RB IL 50 055	RB IR 50 055	50	69/91	107	14	100	20

ELASTIC RUBBER STAINLESS STEEL BALL CASTER WITHOUT THREADED STEM

Left Hand	Right Hand	A (mm)	P (mm)	Load Capacity kg.
RB IL 35 075Z	RB IR 35 075Z	35	75	12
RB IL 50 100Z	RB IR 50 100Z	50	100	20

ELASTIC RUBBER BALL ONLY WITH PLASTIC INSERT

Ball Only	A (mm)
#SPC 35	35
#SPC 50	50

1 WK BALL CASTERS Polyurethane

Original Glass Handling Casters for transport tables in the glass industry.

25.4 mm = 1 inch



Polyurethane Ball Caster

Color Light Brown, 92° Shore A

L = left hand R = right hand

- Temperature Range: -20°C to +80°C of short duration up to 120°C.
- Excellent cutting strength, non-marking, high wear resistance.
- Elastic properties prevent damaging.

POLYURETHANE WHEEL BALL CASTER WITH THREADED STEM

Left Hand	Right Hand	A (mm)	B (mm)	C (mm)	O (mm)	P (mm)	Load Capacity kg.
WK GL 35 075	WK GR 35 075	35	54/71	87	14	75	12
WK GL 35 055	WK GR 35 055	35	54/71	92	14	55	12
WK GL 50 100	WK GR 50 100	50	69/91	107	14	100	20

POLYURETHANE WHEEL BALL CASTER WITHOUT THREADED STEM

Left Hand	Right Hand	A (mm)	P (mm)	Load Capacity kg.
WK GL 35 075Z	WK GR 35 075Z	35	75	12
WK GL 35 055Z	WK GR 35 055Z	35	55	12
WK GL 50 100Z	WK GR 50 100Z	50	100	20

POLYURETHANE BALL ONLY WITH PLASTIC INSERT

Ball Only	A (mm)
#SPW 35	35
#SPW 50	50

25.4 mm = 1 inch



Polyurethane Ball Caster

Stainless Steel Caster

Color Light Brown, 92° Shore A

L = left hand R = right hand

- Temperature Range: -20°C to +80°C of short duration up to 120°C.
- Completely rust proof.
- Excellent cutting strength, non-marking, high wear resistance.
- Elastic properties prevent damaging.

POLYURETHANE STAINLESS STEEL BALL CASTER WITH THREADED STEM

Left Hand	Right Hand	A (mm)	B (mm)	C (mm)	O (mm)	P (mm)	Load Capacity kg.
WK IL 35 075	WK IR 35 075	35	54/71	87	14	75	12
WK IL 50 100	WK IR 50 100	50	69/91	107	14	100	20

POLYURETHANE STAINLESS STEEL BALL CASTER WITHOUT THREADED STEM

Left Hand	Right Hand	A (mm)	P (mm)	Load Capacity kg.
WK IL 35 075Z	WK IR 35 075Z	35	75	12
WK IL 50 100Z	WK IR 50 100Z	50	100	20

POLYURETHANE BALL ONLY WITH PLASTIC INSERT

Ball Only	A (mm)
#SPW 35	35
#SPW 50	50

1

RH BALL CASTERS Heat Resistant Elastic Rubber

Original Glass Handling Casters for transport tables in the glass industry.

25.4 mm = 1 inch



Heat Resistant Ball Caster Elastic Rubber

Color Red, 80° Shore A

L = left hand R = right hand

- Temperature Range: -20°C to +150°C.
- Heat Resistant.
- Excellent cutting strength, non-marking, high wear resistance.
- Elastic properties prevent damage.

HEAT RESISTANT ELASTIC RUBBER WHEEL BALL CASTER WITH THREADED STEM

Left Hand	Right Hand	A (mm)	B (mm)	C (mm)	O (mm)	P (mm)	Load Capacity kg.
RH GL 35 075	RH GR 35 075	35	54/71	87	14	75	12
RH GL 35 055	RH GR 35 055	35	54/71	92	14	55	12
RH GL 50 100	RH GR 50 100	50	69/91	107	14	100	20

HEAT RESISTANT ELASTIC RUBBER WHEEL BALL CASTER WITHOUT THREADED STEM


Left Hand	Right Hand	A (mm)	P (mm)	Load Capacity kg.
RH GL 35 075Z	RH GR 35 075Z	35	75	12
RH GL 35 055Z	RH GR 35 055Z	35	55	12
RH GL 50 100Z	RH GR 50 100Z	50	100	20

HEAT RESISTANT ELASTIC RUBBER BALL ONLY WITH PLASTIC INSERT

Ball Only	A (mm)
#SPH 35	35
#SPH 50	50


Glass Handling Casters are also used for easy handling of other flat sheet materials such as:

- Granite
- Wood
- Plastic
- Paper

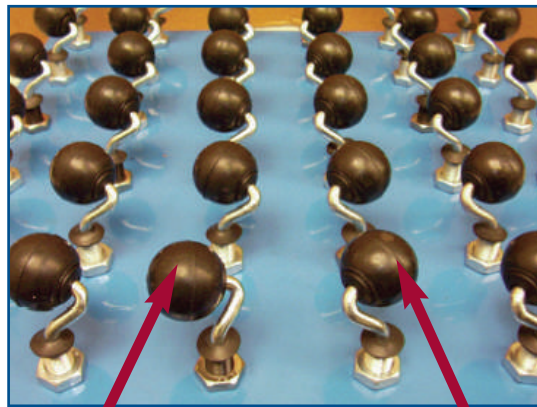

LH Caster bias moves toward the Right

RH Caster bias moves toward the Left

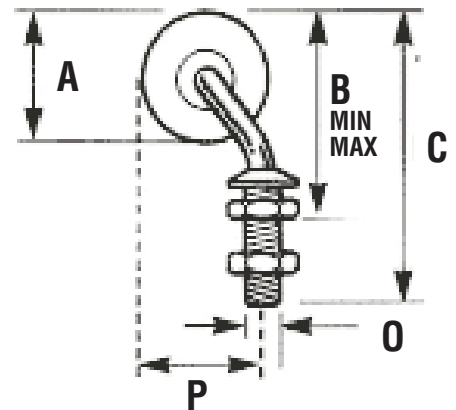

1 kg = 2.2 lbs
25.4 mm = 1 inch