


DOLLY CASTERS

LOW HEIGHT TWIN WHEEL DOLLY CASTERS

Designed for special applications where heavy equipment is moved over level surfaces.

Low Height dual wheel casters (type LL) have high load capacity in relation to its overall height. This is due to the center line of the wheels being within the circumference of the large diameter swivel bearing and the benefits of the differential action of dual wheels.

Best suited for use on hard/smooth floors.

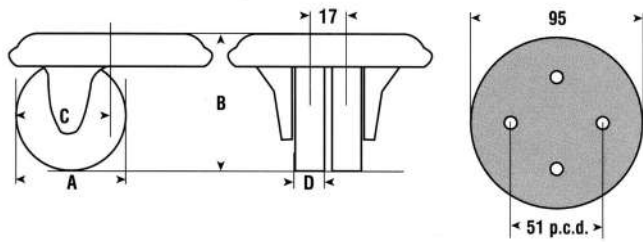

LOW HEIGHT TWIN WHEEL DOLLY CASTERS

Dia. (A)	OAH (B)	Swl. Rad. (C)	Tread (D)	Wheel Type (Wheel Code)	Cap. (lb)	Part Number (Plain Bore)
50 mm	64	50	14	Nylacron™ (NY)	350	LHTWNY/050/14/PB
50 mm	64	50	14	Vulkollan® (VY)	350	LHTWVY/050/14/PB
50 mm	64	50	14	Steel (ST)	600	LHTWST/050/14/PB

*All wheels are available with Precision Bearings for easier rolling under load. To specify, replace "Plain Bore" in part number with "26PB" (ex: LHTW-NY/050/14-26PB)



LOW HEIGHT KINGPINLESS DOLLY CASTERS

Designed for special applications where heavy equipment is moved over level surfaces. These casters have high load capacity in relation to its overall height. This is due to the kingpinless construction with a large diameter caster ball race and the wide wheel.

LOW HEIGHT KINGPINLESS DOLLY CASTERS


Dia. (A)	OAH (B)	Swl. Rad. (C)	Tread (D)	Wheel Type (Wheel Code)	Cap. (lb)	Part Number (Plain Bore)
85 mm	144	100	75	Urethane/CI Core (UY)	1100	05/72VUY/085/75/PB
85 mm	144	100	75	Vulkollan® (VY)	1100	05/72VVY/085/75/PB
85 mm	144	100	75	Nylacron™ (NY)	1300	05/72VNY/085/75/PB

*All wheels are available with Precision Bearings for easier rolling under load. To specify, replace "Plain Bore" in part number with "26PB" (ex: LHTW-NY/050/14-26PB)

OPTIONAL:

Four Position Swivel Lock - SL4 converts the swivel caster to a fixed position for straight line travel. Add SL4 to caster number.

Optional Top Plates Available

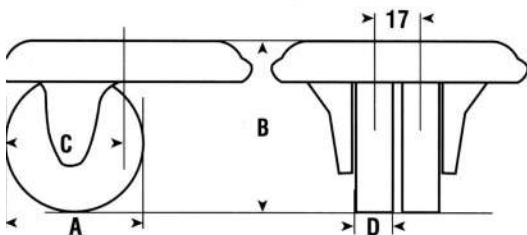

VULKOLLAN®

