

Hand pumps JP and hydraulic hoses JS

Light and powerful



JPA 5



JP 26

Uses and applications for hand pumps


Jacks		JP 26
JH 5 G plus	2x	2x
JH 10 G plus	2x	2x
JH 15 G plus	1x	2x
JH 20 G plus	1x	2x
JHS 5	2x	2x
JHS 10	1x	2x
JHS 10 ku	2x	2x
JH 13 P	2x	2x
JH 30 P	-	1x
JH 50 P	-	-

Hydraulic hand pumps without hoses

Type		JP 26
Oil volume complete/usable	L	2.1 / 2.0
Working pressure	bar / psi	520 / 7540 psi
Connections	pcs	2
Dimensions L x W x H	mm / in	848 x 210** x 169 / 33.3 x 8.3 x 6.6"
Length of hoses	mm / in	variable*
Weight with oil on cart	kg / lbs	14.6 / 32.4
Order number		02 260 000-P

*available up to 15 000 mm **Wide foot plate

Suitable high pressure hydraulic hoses for all of our manual and electric pumps

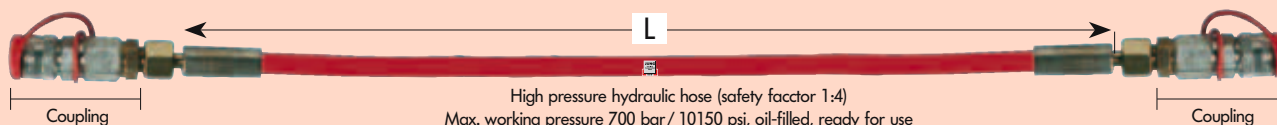

Hose type		JS 2	JS 3	JS 4	JS 6	JS 15
Drip free couplings	no.	2	2	2	2	2
Length	L=mm / in	2 000 / 78.7"	3 000 / 118.1"	4 000 / 157.5"	6 000 / 236.2"	variable*
Order number		15 200 002-0	15 300 002-0	15 400 002-0	15 600 002-0	15.....00-0**

*available up to 15 000 mm

**.....enter L in mm

Recommended for use with two hydraulic jacks

Advantages in detail

- Sturdy construction, yet lightweight and easy to handle.
- Pressure limiting valve provides safety against overloading.
- Optimally compatible with our hydraulic jacks.
- Pumps are equipped with integrated quick-lift for faster working.

Electrical pumps without hoses

Type		JPA 5
Oil volume	L	1,0 / 1,0
Working pressure	bar	520
Connections	pcs	1*
Flow rate high pressure	h / min	1.9 - 30 bar
Flow rate high pressure	h / min	0.1 - 520 bar
Motor facts		12 V DC
Dimensions L x W x H	mm / in	330 x 197 x 203 / 13 x 7.8 x 8"
Length of hoses	mm / in	variable
Weight with oil	kg / lbs	9,1 / 20
Order number		03 102 000-E

*2 connections as option available

JPA 5 Standard version

with 1 hydraulic connection. Accessories including rechargeable battery with carrying case and cable available under order number 03 102 002-E.